


# H07Z-K 单芯无护套绞合软导体交联聚乙烯绝缘布线

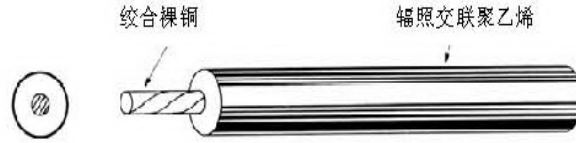

Description	说明
<ul style="list-style-type: none"> <li>● Rate temperature: 90°C</li> <li>● Rate voltage: 450/750V</li> <li>● Standard: DIN VDE 0282-9:2007-12;HD22.9 S3:2007</li> <li>● Class5 requirement given in EN 60228</li> <li>● The insulation shall be a polyolefin cross-linked material T<sub>1</sub> type EI 5 to EN 50363-5</li> </ul>	<ul style="list-style-type: none"> <li>● 额定温度：90°C</li> <li>● 额定电压：450/750V</li> <li>● 参考标准：DIN VDE 0282-9:2007-12;HD22.9 S3:2007</li> <li>● 导体使用标准 EN60228 中要求的第五类导体</li> <li>● 绝缘材料使用符合标准 EN50363-5 的 EI5 型要求的交联聚乙烯</li> </ul>

Application	应用
General-purpose type electrical appliances, equipment Internal fixation wiring	一般用途类电器、设备内部固定布线

No. 编号	Conductor 导体结构		绝缘厚度		MAX.COND.RESISANCE 最大导体直流电阻 (Ω/Km,20°C, DC)	APPROX WEIGHT 参 考重量 (Kg/Km)
	规格 (mm <sup>2</sup> )	CONSTRUCYION 结构 (NO./mm)	THICKNESS 厚度 (mm)	O.D. 外径 (mm)		
HK01150	1.5	48/0.20	0.7	3.05 ± 0.15	13.3	21.9
HK01250	2.5	49/0.25	0.8	3.70 ± 0.15	7.98	33.5
HK01400	4.0	56/0.30	0.8	4.30 ± 0.25	4.95	54.2
HK01600	6.0	84/0.30	0.8	5.00 ± 0.25	3.30	72.4
HK01A00	10	140/0.30	1.0	6.60 ± 0.30	1.91	117.6
HK01A60	16	126/0.40	1.0	8.10 ± 0.30	1.21	181.3
HK01B50	25	196/0.40	1.2	10.1 ± 0.50	0.78	292.5
HK01C50	35	276/0.40	1.2	11.2 ± 0.60	0.554	395.5